

SR2584


ROUGH TERRAIN SCISSORS/4WD



POWER IN EXPERIENCE

- Excellent platform capacity
- Ready for the job site – standard foam filled tires and 4-wheel drive

Snorkel

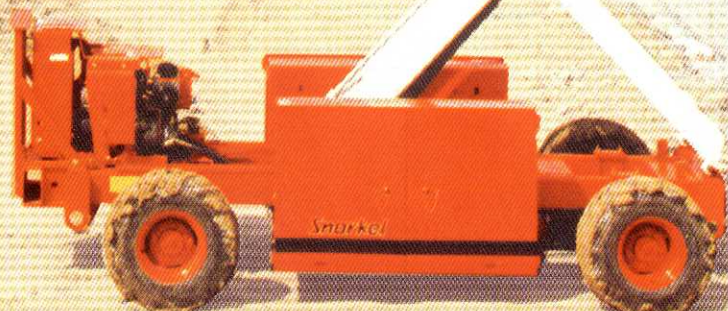

SR2584

ROUGH TERRAIN SCISSORS/4WD

PLATFORM

- A. Height24.9" (7.5 m)
 - B. Size.....6'x 10' (1.8 x 3.0 m)
 - C. Guardrail Height43-1/2" (110 cm)
 - D. Rollout Extension.....4' (1.3 m)
- Capacity1,750 lbs. (793 kg)
Rollout Capacity350 lbs (158 kg)

MACHINE DIMENSIONS

- Stowed Platform Height93.25" (2.4 m)
 - Toeboard Height6" (15 cm)
 - E. Overall Stowed Height.....7'9-1/4" (2.4 m)
 - F. Overall Width.....7' (2.1 m)
 - G. Overall Length.....12'1/2" (3.7 m)
 - H. Wheelbase7'5-1/2" (2.3 m)
- Ground Clearance.....6-3/4" (17.1 cm)
Tire Size/Type.....26 x 12 (Foam filled)

PERFORMANCE


- Weight.....7,200 lbs (3,266 kg)
- Power Source.....Liquid cooled Gas
- Gradeability40%
- Drive speed – Elevated.....0.4 mph (0.6 kph)
- Drive speed – Stowed2.4 mph (3.9 kph)
- Platform Lift speed20 sec. minimum
- Turning Radius – outside.....16'5" (5 m)
- Turning Radius – inside.....8'6" (2.6 m)

OPTIONS

- Swing gate
- Lanyard attachments
- Horn
- Flashing light
- AC generator
- Dual fuel or LP
- Spark arrestor muffler
- Hydraulic outriggers
- Big Paw pneumatic tires (31" x 15-1/2", 79 x 39 cm) 9-3/4" ground clearance: increases width 4" and height 3"

STANDARD FEATURES

- Level sensor
- 4' roll-out extension
- Printed circuit board with on-board LED diagnostics
- Joystick control on removable console
- Fully proportional controls
- Hydraulic warm-up kit
- Manual bleed down
- Articulating rear axle
- 4-wheel drive system
- Dual wheel drive system
- 2-wheel parking breaks
- Driveable at full height
- Drive motion alarm
- Side trays
- Foam filled tires
- High engine temp and low oil pressure shut down
- Hour meter
- 125 volt GFCI AC outlet at platform

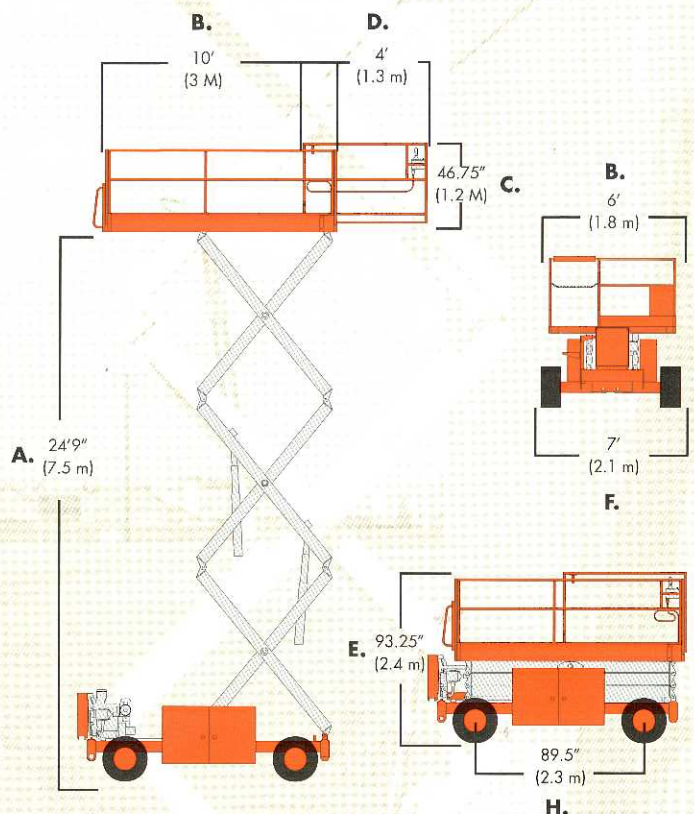

DANGER: Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine.

Only qualified and trained operators are to be authorized to use and operate a work platform. Aerial work platforms must be elevated only on firm, level surface. Products in this brochure comply with applicable ANSI Standards.

This literature is for illustrative purposes only. Consult Operating Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

Snorkel

An ISO 9001 Registered Company
Printed in U.S.A. SR2584 10-02

Manufacturing Plant

2009 Roseport Road
Elwood, KS 66024
800-255-0317 Toll Free
785-989-3000 Office
785-989-3070 Fax

Australia

26 Redfern Road
Wetheril Park NSW
2164 Australia
(02) 9725 4000 tel
(02) 9609 3057 fax